




GREE U-Crown R32

Features: Standard Optional

- | | | | | | | |
|-------------------|-------------|------------------------|-----------------------------|--------------------------|----------------|-------------------------|
| 3D Airflow | LED Display | 7 Fan Speeds | Quiet Design | 24-hour Timer | Lock | Wifi Control |
| Auto Clean | I-Feel | Auto-Restart | -30°C Heating | 54°C Cooling | Dehumidifying | Light Function |
| R32 | 8°C Heating | Intelligent Preheating | 130° Swing Angle Left-right | 180° Swing Angle Up-down | Remote Control | Mono & Multi Compatible |
| Four Sleep Curves | | | | | | |

Energy-saving two-stage compressor

Energy-saving two-stage compressor, outstanding performance at the ambient temperature range from -30°C to 54°C.

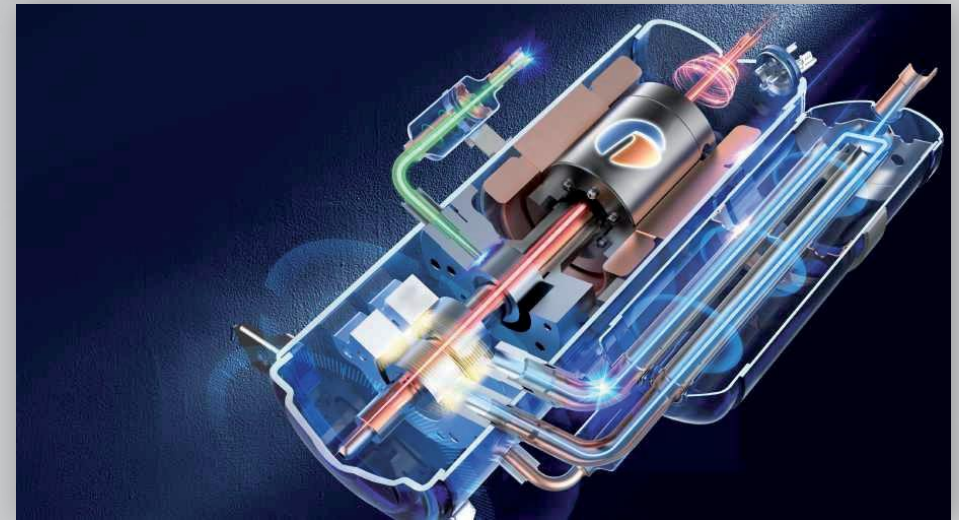

8°C homothermal heating

Maintain the room temperature steadily at 8°C and prevent the room from freezing by heating.



Wide angle air supply

Swing angle from left-right is up to 130°, swing angle from up-down is up to 180°.



Wifi control

Enjoy intelligent life.





TECHNICAL SPECIFICATIONS

			UCROWNR3212	UCROWNR3218
COOLING CAPACITY (MIN - NOM - MAX)		kW	0.30 - 3.53 - 4.80	1.2 - 5.3 - 6.5
COOLING CAPACITY (MAX)		BTU/h	16378	22184
HEATING CAPACITY (MIN - NOM - MAX)		kW	0.6 - 4.0 - 6	1.3 - 5.3 - 7.0
HEATING CAPACITY (MAX)		BTU/h	20472	23890
PDESIGNC		kW	3.5	5.3
EER/COP		W/W	4/4	3.66/3.73
SEER/SCOP		-	7.2/5.5	6.8/5.1
ENERGY CLASS			A++/A+++	A++/A+++
AIR FLOW VOLUME (SS, H, MH, M, ML, L, SL)		m ³ /h	650/500/450/400/330/250/220	850/750/650/600/500/400/340
DEHUMIDIFICATION		L/h	0.8	2
POWER SUPPLY		V/Ph/Hz	220-240/50/1	220-240/50/1
POWER INPUT	COOLING	W	883	1450
	HEATING	W	1000	1420
CURRENT INPUT	COOLING	A	5.8	6.5
	HEATING	A	6.8	6.5
RATED CURRENT	COOLING	A	9.7	9.1
MAX. DISTANCE	LENGTH	m	10	10
	HEIGHT	m	20	25
OUTDOOR UNIT			GWH12UB-K3DNA4A/O	GWH18UC-K3DNA4A/O
NET DIMENSIONS(W x H x D)		mm	899×596×378	950×700×396
NET/GROSS WEIGHT		Kg	43.5/46.5	50.5/55
SOUND PRESSURE LEVEL/SOUND POWER LEVEL		dB(A)	53/63	57/64
ADDITIONAL GAS CHARGE		g/m	16	16
REFRIGERANT TYPE			R32	R32
REFRIGERANT CHARGE		kg	0.9	1.4
LIQUID PIPE DIAMETER/GAS PIPE DIAMETER		mm	φ6/φ9.52	φ6/φ12
MAX. PIPE LENGTH WITHOUT ADDITIONAL CHARGE		m	5	5
OPERATION RANGE FOR COOLING/HEATING		C°	-18~54 / -30~24	-18~54 / -30~24
INDOOR UNIT			GWH12UB-K3DNA4A/IB	GWH18UC-K3DNA4A/I
REFRIGERANT TYPE			R32	R32
NET DIMENSIONS (W x H x D)		mm	860×305×170	960×320×205
NET/GROSS WEIGHT		Kg	11.5/14	14/17
SOUND PRESSURE LEVEL (SS/H/MH/M/ML/L/SL)		dB(A)	42/37/33/29/26/23/21	46/40/37/33/28/24/22
SOUND POWER LEVEL (SS/H/MH/M/ML/L/SL)		dB(A)	58/51/47/43/40/37/35	56/50/47/43/38/34/32

*Gree reserves the right to modify the specifications without prior notice, please confirm the final specifications with sales representatives.

UCROWNR32 12K : €1,395 €1,195 UCROWNR32 18K : €1,495 €1,295

5 YEARS
WARRANTY

+2 YEARS
EXTENDED
WARRANTY

9K to 16K - €60
18K to 24K - €120

A: 300, St. Thomas Street Tarxien, TXN1602, MALTA.

M: +356 7989 3193 / T: +356 2789 3193

E: info@cooltekservices.com.mt

W: www.cooltekservices.com.mt